

# DCU 208E Control Unit




## At a glance

- 19 new flexible configurable channels
- Configurable for either digital input, digital output, 4-20 mA input, 0-5V input
- 2 thermistor input channels
- Dual J1939 interfaces
- 1 magnetic pickup channel
- Latest 1Ghz dual core CPU for lightning response
- Ethernet and Modbus communication

## Why customers select the DCU 208E

- 11 languages selectable by one touch at any station
- Accepts multiple sensor standards
- Intuitively configurable using just an internet browser
- Ethernet "Plug & Play" connectivity for remote panels
- Programmable engine control logic including auto and multiple start attempts
- No special tools or cables – USB port for "One Touch" updates



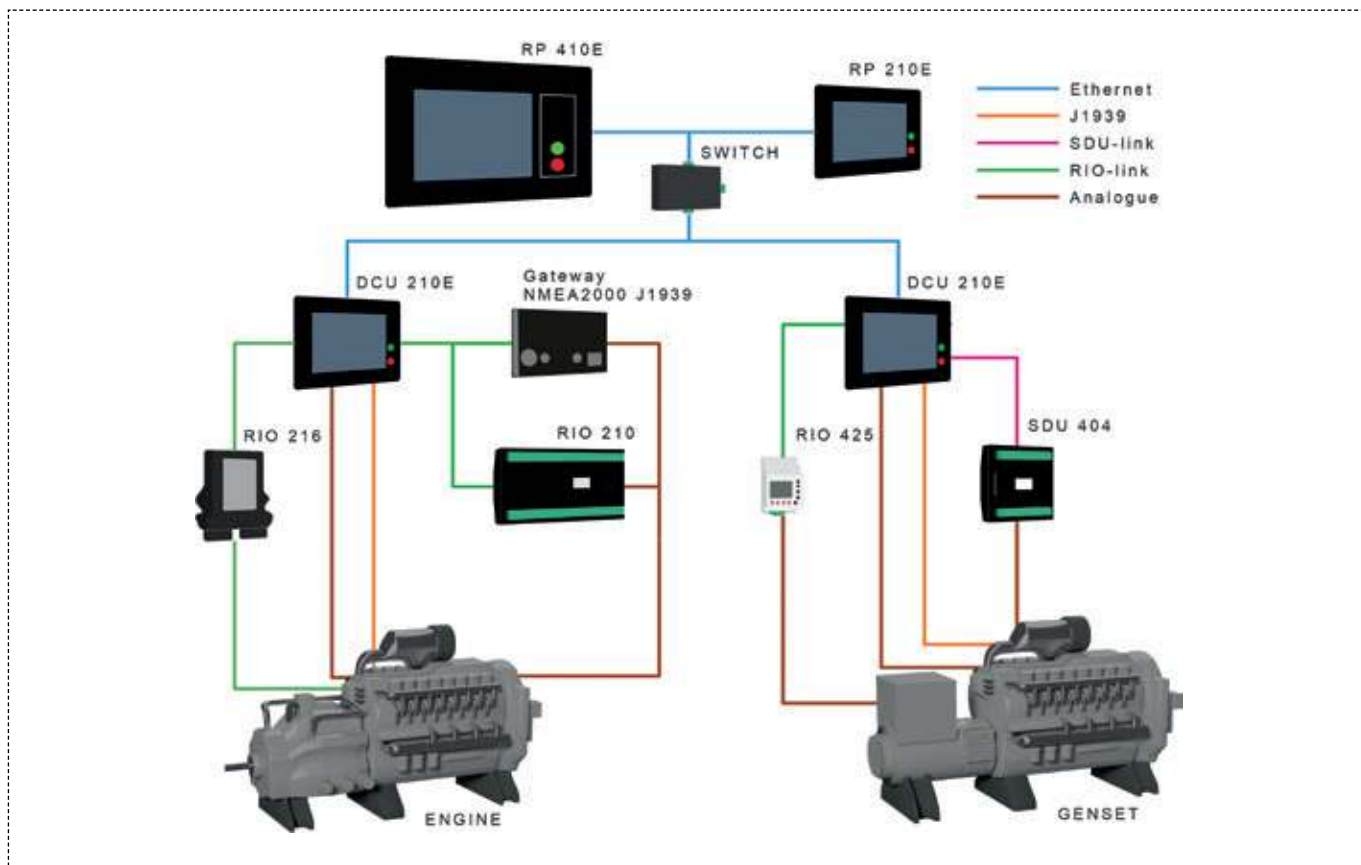

## Features and Benefits

**Same hardware for many applications**

- Can hold over 40 customer selectable configuration files
- Connectable to multiple engine types and or ships systems
- Suitable for fixed and variable speed applications
- Multiple standard I/O's and outputs

**No specialist skills required**

- 11 languages as standard inc Chinese and Russian
- No special tools
- No special software, just an internet browser
- Single unit simpler than gauges and a CAN reader

**Cost Effective**

- Integrated display and logic eliminates wiring faults
- Can link with SDU units to form Restricted Class solutions
- Mix and match with RIO units for reduced cost vessel systems

**Accountability**

- Secure historical event and alarm list
- Displays J1939 faults in real text
- Can link to third party Ship management and remote telemetry systems
- Additional remote screen provides clear precise information to operator

Auto-Maskin AS  
 Hvamsvingen 22  
 NO-2013 SKJETTEN  
 Norway  
 Phone: (+47) 64 84 52 00  
 Fax: (+47) 64 84 52 12  
 E-mail: office@auto-maskin.com  
 Web: www.auto-maskin.com

### Ordering Info

ITEM	PART NUMBER
DCU 210E	1006475
DCU 208E	1006477
RP 210E	1006476
RIO 210	1006462