

Introduction

Anda NM (33Ah-250Ah) series is designed for standby use with 10-year design life in float service. The series battery is featured of high consistency, excellent performance and reliable standby service life. It is widely applied in float service, UPS/EPS, medical equipment, telecom, photovoltaic, control system and security system.


Battery Features

- Increase durability and deep cycle ability for heavy demand applications
- Low self-discharge
- Fully tank formed plates
- Low impurity electrolyte
- Spill proof / leak proof
- Multi-position usage
- ABS case and cover VO upon request
- Very high purity lead

Electrical Specification

Design floating Life @ 20°C (68°F)	10 years
Nominal Capacity @ 25°C / 77°F	
20 hour rate 10.72A to 1.75Vpc	214.4Ah
10 hour rate 20.91A to 1.75Vpc	209.1 Ah
Internal Resistance	
(Fully charged battery @ 25°C / 77°F)	3.5 mΩ
Max. Discharge Current @ 25°C / 77°F	2000 A (5S)
Charge Methods: Constant voltage charge @ 25°C / 77°F	
Cycle Use	14.7 ~ 14.9V
Max. Current	53 A
Standby Use	13.6 - 13.8V
Operating Temperature Range	-30 ~ 50°C
<i>Notes: battery voltage must be adjusted according to temperature. Please refer to our recommendation.</i>	
Self-Discharge	
3% of capacity declined per month @ 25°C (77°F).	

Battery Picture & Terminal Layout

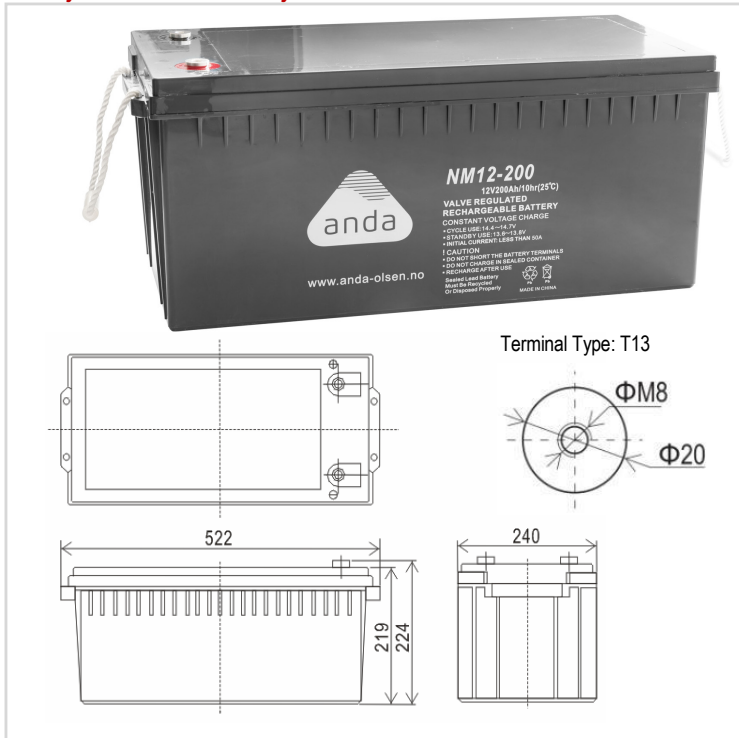

Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height	Height		
522 mm	240 mm	219 mm	224 mm	59.7 kg	
20.6 inch	9.4 inch	8.6 inch	8.8 inch	131.6 lbs	

Typical Applications

- Telecommunications
- Power Utility
- Data Center
- UPS & EPS

Certificates



Constant Current Discharge (Amperes @ 25°C / 77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	436.1	332.9	287.6	242.3	205.1	200.8	187.2	174.8	163.5	153.6	153.1	83.00	59.06	49.05	40.10	21.43	10.82
1.65	414.1	316.1	274.6	233.0	199.6	195.5	182.6	170.8	160.2	151.0	151.0	81.40	57.93	48.02	39.18	21.32	10.82
1.70	397.0	303.1	263.7	224.4	193.2	189.0	176.6	165.3	155.2	146.5	146.9	78.65	56.59	46.89	38.25	21.12	10.82
1.75	378.7	289.1	252.0	214.8	185.8	181.9	170.3	159.8	150.5	142.7	143.7	76.47	55.36	45.86	37.43	20.91	10.72
1.80	359.1	274.1	239.6	205.0	178.5	174.6	163.7	153.8	145.2	138.0	139.6	73.73	54.02	44.73	36.50	20.37	10.62

Constant Power Discharge (Watts/cell @ 25°C / 77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	757.4	578.1	508.8	439.4	383.1	376.0	349.3	324.7	301.9	282.6	279.1	153.4	111.7	92.65	76.30	42.75	22.56
1.65	730.5	557.6	491.8	425.9	373.0	366.1	340.4	316.7	294.9	276.6	273.9	150.3	110.6	91.62	75.27	42.34	22.56
1.70	702.4	536.2	473.5	410.8	361.1	354.5	330.1	307.7	287.2	270.3	268.7	146.7	108.6	90.03	74.14	41.52	22.25
1.75	671.9	512.9	453.7	394.5	348.2	341.8	318.8	297.7	278.6	263.0	262.5	142.0	105.5	87.82	72.80	41.21	21.85
1.80	638.9	487.7	432.3	376.9	334.5	328.2	306.5	286.7	269.0	254.7	255.2	137.0	102.7	85.61	71.16	40.80	21.64

Graphs

